


HOISTWAY / COUNTERWEIGHT DIMENSIONS

CONFIGURATION		H1	H2	H3	H4	H5	H6	H7	H8	H9	H10	H11
SEISMIC ZONE	CWT SAFETY											
✘	✘	6'-8"	6'-3"	1'-1 1/4"	3'-9 1/2"	3'-2 3/4"	6 3/4"	7'-4"	3'-8"	6 1/4"	8"	5"
✘	✓	7'-0"	6'-7"	1'-5 1/4"	4'-1 1/2"	3'-5"	8 1/2"	7'-4"	3'-8"	6 1/4"	8"	5"
✓	✘	6'-10"	6'-5"	1'-3 1/4"	3'-11 1/2"	3'-3 3/4"	7 3/4"	7'-8"	3'-10"	8 1/4"	10"	5"
✓	✓	7'-2"	6'-9"	1'-7 1/4"	4'-3 1/2"	3'-6"	9 1/2"	7'-8"	3'-10"	8 1/4"	10"	3"

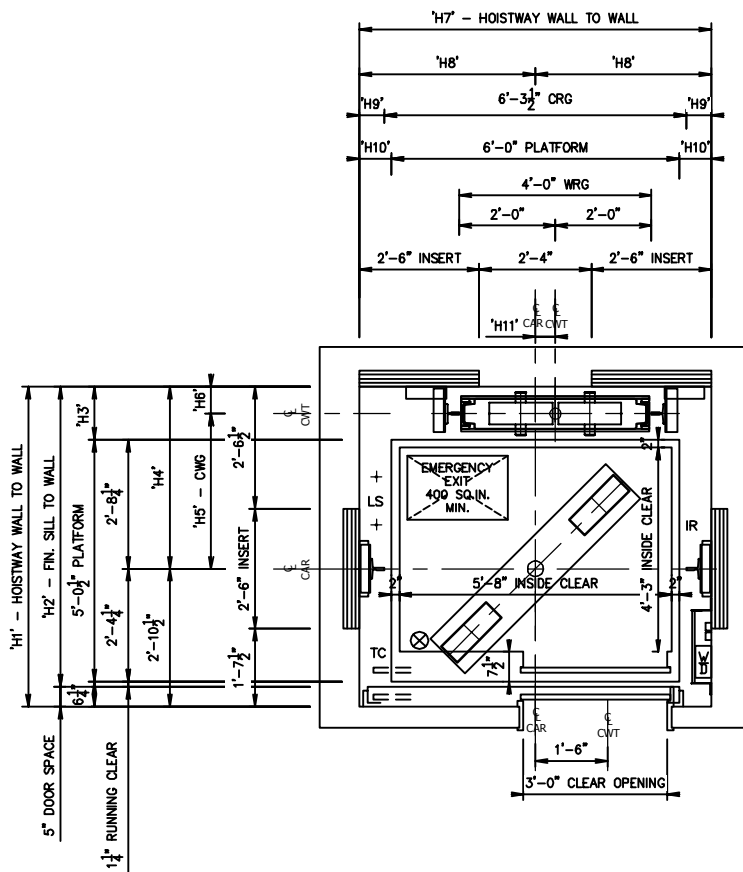

MRL  
 SINGLE CAR 2100 lbs.  
 HOISTWAY PLAN  
 SPEED 200, 350, 500 FPM  
 CHAIN COMPENSATION(IF REQ'D)

WARNING:  
 FUJITEC PROPRIETARY INFORMATION  
 Reproduction and/or use of all or any part  
 of the page, drawing or information herein,  
 without the express written permission of  
 Fujitec America, Inc., is strictly prohibited  
 by law.  
 VIOLATORS WILL BE PROSECUTED

**FUJITEC AMERICA, INC.**

TITLE: MRL STD. LAYOUTS  
 PREPARED: M.SOLOMONOV DATE: 08/16/16  
 APPROVED: R.BRUN DATE: 08/16/16

MANUAL NO.  
 SE-G-038

REV:  
 PAGE:  
 1